



Energy-Free Emergency Exit Signs 100 Foot Viewing Distance, UL 924 Listed

Features

- Fail-Safe Technology
- Zero operating expenses – saves hundreds of dollars
 - No electricity usage
 - No battery replacements
 - No bulb replacements
 - No disposal fees
 - No testing labor
- Low installation cost
 - No electrical service required
 - Quick mechanical setup
- Non-toxic, non-radioactive
- LEED Points Qualified
- Thin, low profile construction
- Consistent, uniform illumination

Technical Information

Size: 8-5/8" x 15-7/8"
 Background: Grey
 Illumination: High Visibility Chartreuse (light green/yellow)
 Visibility: 100 feet
 Directional: Chevron kit included, to be installed on-site
 Construction: ABS Plastic with Photoluminescent Lettering / UV

Life Expectancy

25+ years

Installation


Surface, flag or ceiling mounted options. Aluminum Frame and Mounting Bracket. Before installation it must be determined that there is a minimum of 5 foot-candles (54 lux) of fluorescent MH or MV light on the face(s) of the sign at all times during building occupancy.

Applications

Both high level and low location mounting
 Suitable for floor proximity installation

Approvals:


Meets NFPA Life Safety Code 101 and OSHA requirements
 Meets International Building Code 2009 and Fire Code 2009
 UL 924 Emergency Lighting and Power Equipment Listed through ETL

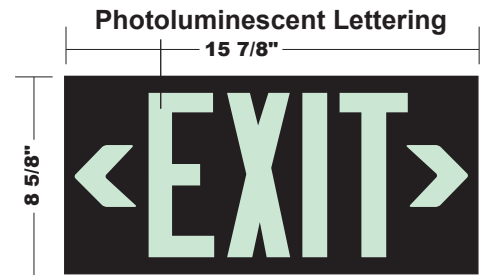


Frame




Aluminum Wall Mount Bracket



Aluminum Ceiling/Flag Mounting Bracket

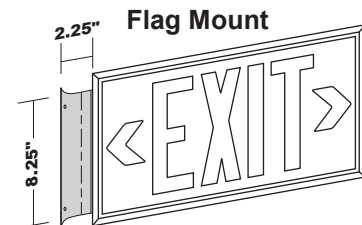

Ceiling Mount



ORDERING INFORMATION

SIGN	FACES	FRAME COLOR	CEILING / FLAG MOUNTING BRACKET
VIV100RED 	S = Single	S = Silver	S = Silver
VIV100GRN 		W = White	W = White
VIV100BLK 	D = Double	B = Black	B = Black

E.G. VIV100RED-S-S-S. Red Sign, Single Face, Silver Frame & Silver Mounting Bracket

vivigLO

Technologies, Inc.

P.O.Box 52795

Irvine, CA 92619

Web: www.viviglo.com

Email: lgroll@viviglo.com

Phone: (949) 933-9738