



## Energy-Free Emergency Exit Signs 50 Foot Viewing Distance, UL 924 Listed Scratch Resistant Background

### Features

- Fail-Safe Technology
- Zero operating expenses – saves hundreds of dollars
  - No electricity usage
  - No battery replacements
  - No bulb replacements
  - No disposal fees
  - No testing labor
- Low installation cost
  - No electrical service required
  - Quick mechanical setup
- Non-toxic, non-radioactive
- LEED Points Qualified
- Low profile aluminum construction

### Technical Information

Size: 8.5" x 15.75" with chevron kit  
 Background: Red or Green  
 Illumination: High Visibility Chartreuse (light green/yellow)  
 Visibility: 50 feet  
 Directional: Chevron kit included, to be installed on-site  
 Construction: Aluminum body with Photoluminescent Lettering

### Life Expectancy

25+ years

### Installation

Surface, flag or ceiling mounted options. Aluminum Frame and Mounting Bracket. Before installation it must be determined that there is a minimum of 5 foot-candles (54 lux) of fluorescent light on the face(s) of the sign at all times during building occupancy.


### Applications

Both high level and low location mounting  
 Suitable for floor proximity installation


### Approvals:

Meets NFPA Life Safety Code 101 and OSHA  
 Meets International Building and Fire Codes  
 Listed through UL 924 for the USA and Canada  
 Listed with the State of California State Fire Marshal

### Photoluminescent Lettering

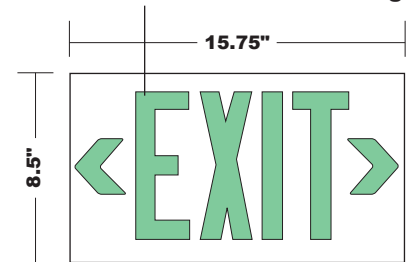


### Frame

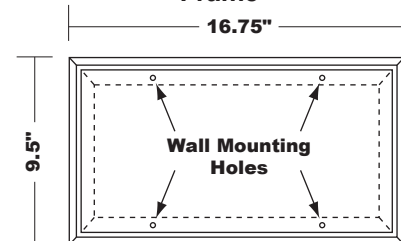


### Aluminum Ceiling/Flag Mounting Bracket

#### Flag Mount

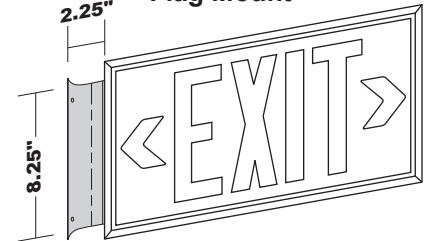

#### Ceiling Mount

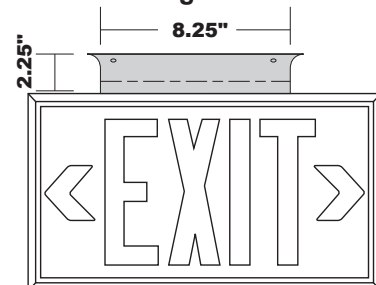

### ORDERING INFORMATION

SIGN	FACES	FRAME COLOR	CEILING / FLAG MOUNTING BRACKET
<b>VIV50RED</b> 	S = Single	S = Silver	S = Silver
		W = White	W = White
<b>VIV50GRN</b> 	D = Double	B = Black	B = Black

E.G. VIV50RED-S-S-S. Red Sign, Single Face, Silver Frame & Silver Mounting Bracket

**vivigLO**

Technologies, Inc.

P.O.Box 52795

Irvine, CA 92619

Web: [www.viviglo.com](http://www.viviglo.com)

Email: [lgroll@viviglo.com](mailto:lgroll@viviglo.com)

Phone: (949) 933-9738