



Energy-Free Emergency Exit Signs 75 Foot Viewing Distance, UL 924 Listed

Features

- Fail-Safe Technology
- Zero operating expenses – saves hundreds of dollars
 - No electricity usage
 - No battery replacements
 - No bulb replacements
 - No disposal fees
 - No testing labor
- Low installation cost
 - No electrical service required
 - Quick mechanical setup
- Non-toxic, non-radioactive
- LEED Points Qualified
- Low profile aluminum construction

Technical Information

Size: 8.5" x 15.75" with chevron kit
 Background: Photoluminescent
 Lettering: Red or Green
 Illumination: High Visibility Chartreuse (light green/yellow)
 Visibility: 75 feet
 Directional: Chevron kit included, to be installed on-site
 Construction: Aluminum body with Photoluminescent Coating

Life Expectancy

25+ years

Installation

Surface, flag or ceiling mounted options. Aluminum Frame and Mounting Bracket. Before installation it must be determined that there is a minimum of 5 foot-candles (54 lux) of fluorescent light on the face(s) of the sign at all times during building occupancy.


Applications

Both high level and low location mounting
 Suitable for floor proximity installation


Approvals:

Meets NFPA Life Safety Code 101 and OSHA
 Meets International Building and Fire Codes
 Listed through UL 924 for the USA and Canada
 Listed with the State of California State Fire Marshall


Photoluminescent Background

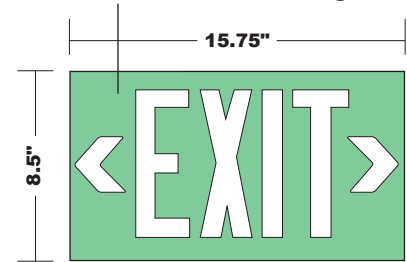


Frame

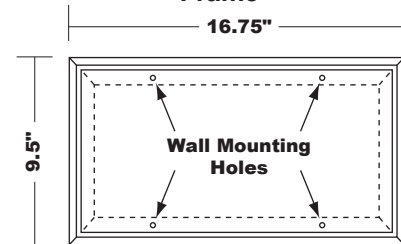

Aluminum Ceiling/Flag Mounting Bracket

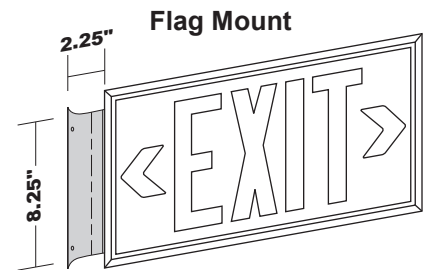

Ceiling Mount

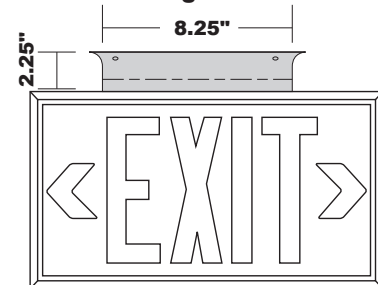

ORDERING INFORMATION

SIGN	FACES	FRAME COLOR	CEILING / FLAG MOUNTING BRACKET
VIV75RED 	S = Single	S = Silver	S = Silver
		W = White	W = White
VIV75GRN 	D = Double	B = Black	B = Black

E.G. VIV75RED-S-S-S. Red Sign, Single Face, Silver Frame & Silver Mounting Bracket

vivigLO

Technologies, Inc.

P.O.Box 52795

Irvine, CA 92619

Web: www.viviglo.com

Email: lgroll@viviglo.com

Phone: (949) 933-9738